CyberMed G Series

Fanless Medical Computer






Main Features

- Premium Display Panels
- PCAP Multi-Touch Display
- IP65 Rated
- Global IEC60601-1 Certified
- Fanless Design
- Antimicrobial* Housing

Technical Specifications

Display	22": 1920x1080 16:9 178°/178° Viewing Angle		
	24": 1920x1080 16:9 178°/178° Viewing Angle, optional 2560x1440		
CPU Support	11th Generation Intel Core i3/i5/i7 Processors		
Memory	2x DDR4 SO-DIMM Sockets, Populated up to 64GB		
Operating System	Windows 11, Windows 10, Windows IoT, Linux		
Video & Graphics	Intel Iris Xe Graphics		
Touch Screen	PCAP Multi-Touch with Optional Antiglare Technology		
Networking	2x 2.5 Gigabit (Gbe) LAN		
Wireless	Intel Tri-Band WiFi 6E 802.11ax, 802.11 a/b/g/n/ac, + Bluetooth 5.2		
Expansion Slots	1x mPCIe Full-size slot		
	1x M.2 E Key Short Slot for PCIe or USB Interface		
HDD Support	1x 6Gbps Serial ATA III Port		
	1x M.2 M Key for NVMe SSD		
ТРМ	Version 2.0 Standard. Optional: Version 1.2		
Battery	3x Hot Swap Batteries with up to 16 hours runtime (CyberMed G22B & CyberMed G24B)**		
	** 1 year warranty. Cybernet strongly recommends replacing every 2 years.		
Power Supply	Medical Grade Power Supply with Universal input: 100~240V AC, 50-60Hz Output: 19V		
	12V/24V Support with Optional DC Converter		
Relative Humidity	10%~90% (non-condensing)		
IP Rating	IP65 Sealed Front Bezel and IPX1 Back Cover		
Pressure	700 to 1060hPa (0~3000 meters)		
DC Power Out	Optional: Power Module with 26 Watts of Power Available for External Devices		

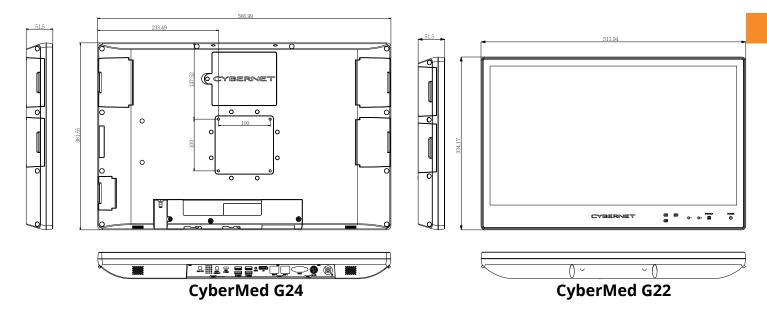

Mechanical & Environmental

Dimensions	24": 22.32" × 14.23" × 2.02" (L,W,D) 22": 20.15" × 13.15" × 2.02" (L,W,D)		
Weight	24": 14.8 lbs 17.2 lbs with three hot swap batteries*		
	22": 13.3 lbs 15.7 lbs with three hot swap batteries*		
Wall Mount	Supports 100mm VESA mounting holes		
Environment	Ambient Temperature: 0°C~35°C (operating)		
Certifications	UL60601-1, cUL60601-1, IEC60601-1, IEC60601-1-2, EN60601-1, IEC62368-1 electrical safety,		
	FCC class B, CE, Energy Star, RoHS, WEEE, REACH		
	*Weight of the base stand not included in totals		

Input/Output

I/O Ports	4x USB 3.2 Gen1	1x RS232/422/485
	2x USB2.0 (Side)	1x Display Port
	1x USB-C (10Gbps) Supports 15W Power Delivery, 5V/3A	1x 4Pin DIN Power Jack
Audio	Realtek High Definition Audio. Two built-in 3.0 watt speakers.	
	One combination jack for Audio Line Out and Microphone.	

Optional Features

- 4k Ai Powered Webcam
- DC Power Output for Peripherals
- HIPAA Compliant Privacy Filter
- Internal UPS Battery
- Up to 5x COM (RS232) Ports on Back Cover
- Antiglare Touchglass

- 2k Panel (24" Only)
- 2D Barcode Scanner
- Smart Card Reader
- Integrated Imprivata SSO Certified RFID Reader
- Extended Warranties





Ready for your CyberMed G Series?

m