


# Enterprise Monitor

## MVA Enterprise Monitor




## Main Features

- High Resolution Panel
- PCAP Multi-Touch Display
- IP65 Rated
- Wide Viewing Angle

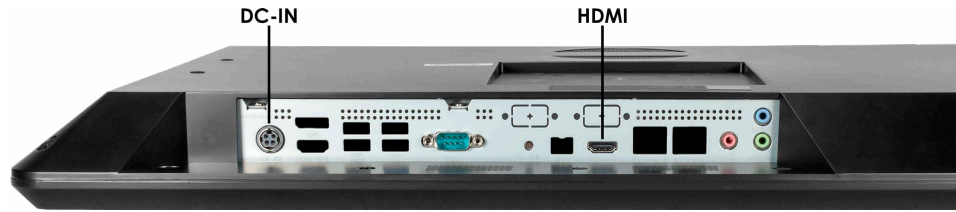


## Technical Specifications

<b>Display</b>	MVA LED Panel 1920x1080
<b>Touch Screen</b>	PCAP Multi-Touch with Optional Antiglare Technology
<b>Aspect Ratio</b>	16:9
<b>Viewing Angle</b>	Horizontal 178 Degrees , Vertical 170 Degrees (Typical)
<b>Number of Colors</b>	16.7M
<b>Brightness</b>	250 cd/m2
<b>Contrast Ratio</b>	1000:1
<b>Response Time</b>	25ms
<b>Video Input</b>	HDMI
<b>Power Supply</b>	120W Power Supply, Input: universal 100~240V AC, 50-60Hz. Supports Output range: DC18V-19V, 7.5A Adapters for Energy Star 6.0/UL
<b>Relative Humidity</b>	10%~90% (non-condensing)
<b>Waterproof</b>	IP65 Sealed Front Bezel and IPX1 Back Cover

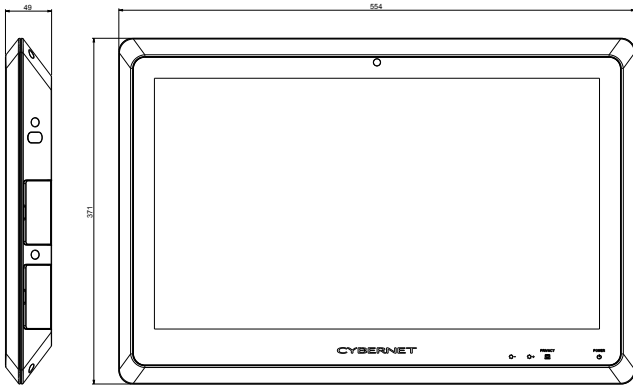

**22" Enterprise Monitor**

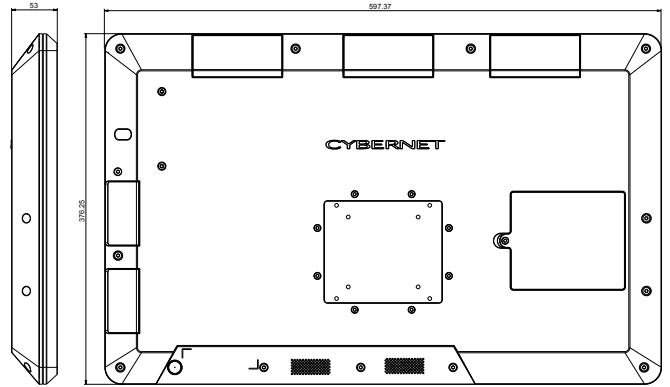

**24" Enterprise Monitor**

## Mechanical & Environmental

<b>Dimensions</b>	<b>22" Monitor:</b> 21.75" x 14.5" x 1.92" (L,W,D)   <b>24" Monitor:</b> 23.5" x 14.8" x 2.1" (L,W,D)
<b>Weight</b>	<b>22" Monitor:</b> 15.35 lbs*   <b>24" Monitor:</b> 17.75 lbs*
<b>Wall Mount</b>	Supports 75mm & 100mm VESA mounting holes
<b>Environment</b>	Ambient Temperature: 0°C~40°C (operating)
<b>Certifications</b>	UL60601-1, cUL60601-1, IEC60601-1, EN60601-1, UL60950 electrical safety, FCC class B, CE, Energy Star 6.1, RoHS 2, WEEE
	*Weight of the base stand not included in totals

## Input/Output

<b>I/O Ports</b>	1x HDMI - In 1x USB Input (for touchscreen) 1x 4Pin DIN power Jack
<b>Audio</b>	2-channel 2Watt speaker facing back

## Optional Features

- Antiglare Touchglass
- Extended Warranties

